


Order information



We need the following order information:

1. For the precision parallels:
 - jaw width (B) (available in width B = 90 mm, 100 mm, 125 mm, 160 mm and 200 mm; additional sizes are available on request). Depending on your vise, we offer two different types of parallels:

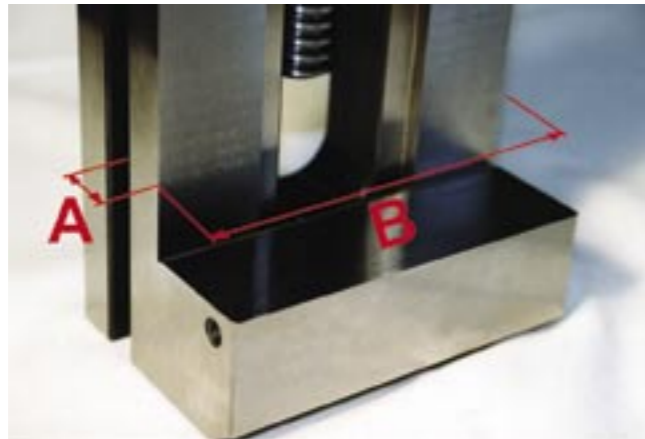

2. For the **cliparc**® clamp clip:
 - frame width (A) tolerance for A = +/- 0,1 mm

We offer different sets of precision parallels depending on the jaw width.
For instance, for the jaw width (Dimension B) 125 mm:

- Sets of 32, 17 or 5 precision parallels.
- The sets of the precision parallels come in a handy wooden stand.
The **cliparc**® clamp clips will be adjusted to the size of your vise (Dimension A). Included are four **cliparc**® clamp clips.



Visit our homepage: www.cliparc.de

There you will find an overview of common vises and the suitable type of parallels as well as a video-clip about **cliparc**®.

Sales representative:

Recommended by:




Fraunhofer
Technologie-
Entwicklungsgruppe

Just a click and you are ready!

All features:

Just insert the cliparc clamp clips into the parallels and then click to the vise.
No installation tools necessary!

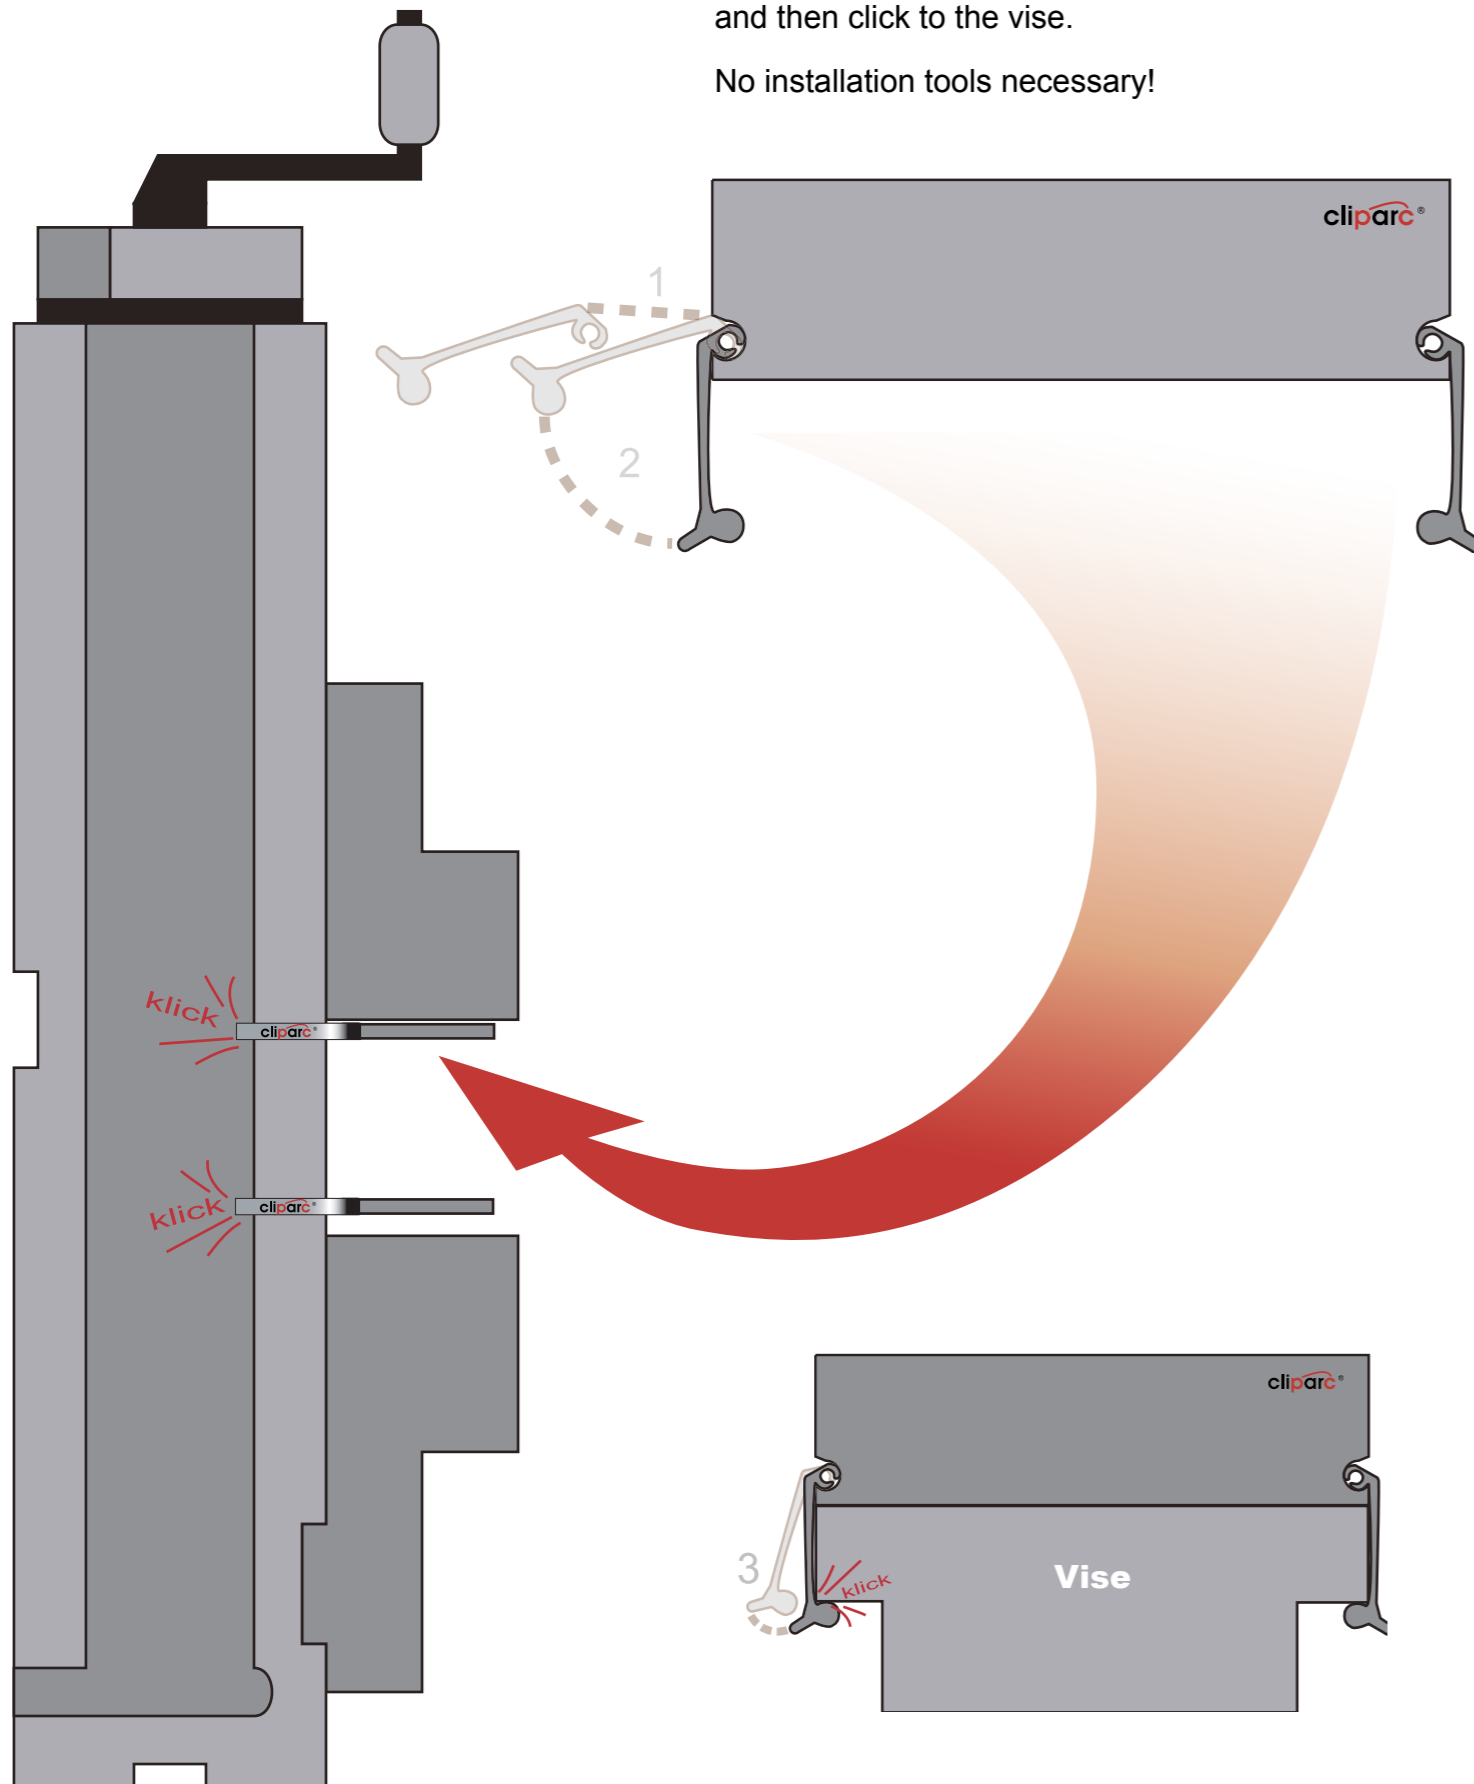

Stationary during machining and during opening.

No matter if your machine is running or if you open the vise, Cliparc® precision parallels stay in the position you set them up. No time consuming repositioning necessary.

Height-steps of 1mm.

Awkward combinations of several parallels no longer required. Use the set of Cliparc® precision parallels in height steps of 1 mm.

Only 3mm wide.

Short edge distance holes can be manufactured without problems due to the narrow Cliparc® precision parallels. No step vise jaws necessary.

Precision and quality.



Parallelism below 0,005 mm guarantees precise results.

Easy to clean!

The Cliparc® system prevents any deposition of chips, dust or dirt below the parallels. This reduces cleaning time dramatically compared to regular parallels.

Unlimited range of application.

Cliparc® precision parallels are available in sizes of 90 mm, 100 mm, 125 mm, 160 mm and 200 mm. The clips of the Cliparc® system are available in different sizes for all standard NC-machine-vises, grinding- and controll-vises.

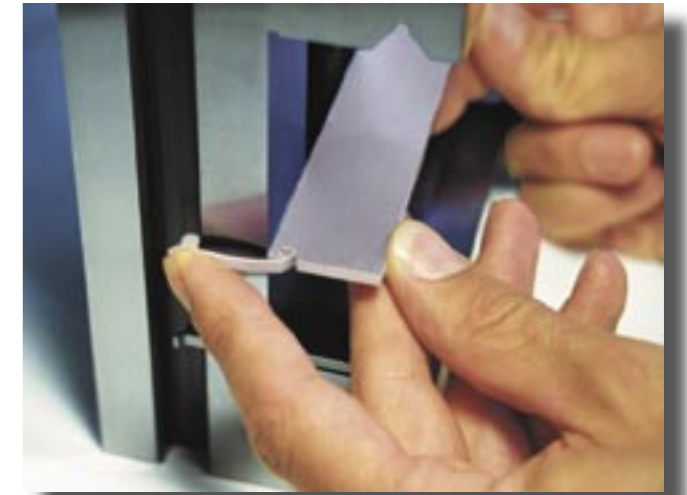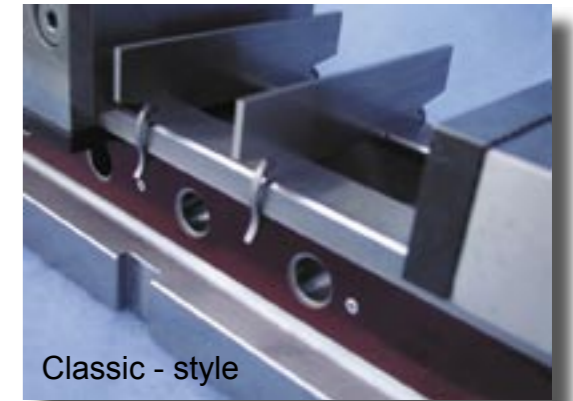

cliparc®
simple, fast and safe